


# Flexible LED Strip Light

## 16.6mm pitch IP67 (100mm Cut Substrate)



### Product Dimensions

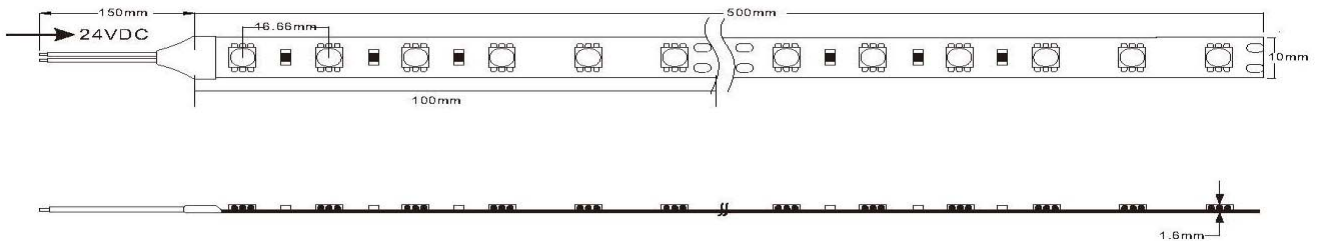

### Product Specification

Model No.	BF67C-VW060H3 D2B1-100A	BF67C-WW060H 3D2B1-100A	BF67C-NW060H3 D2B1-100A	BF67C-DW060H3 D2B1-100A
<b>Color Temp</b>	2700K ±200K	3000K ±200K	4000K ±200K	5000K ±200K
<b>Ra</b>	≥90			
<b>Size</b>	(L)1000 x (W)15 x(H)3mm			
<b>Beam angle</b>	120°			
<b>Life time</b>	50,000hours @25°C			
<b>Operating Temp</b>	Ta -20°C to 40°C (Tc max = 70°C)			
<b>Power consumption</b>	14.4W (±5%) Per Meter			
<b>LED Chip</b>	SMD5050 Super Brightness			
<b>Finish</b>	IP20 Non-Waterproof, IP65 Silicon Coated, IP67 Silicon Tube Only, IP68 Silicon Tube + Silicon Glue.			
<b>Connection</b>	Hardwire terminal connection / Male or Female Plug connection			
<b>Control</b>	PWM(1-10V) or DMX			
<b>Cover/Lens</b>	Milky White PC Cover			
<b>Driver</b>	IC Self Designed Constant Current			
<b>Input Voltage</b>	DC 12V or 24V			
<b>Luminous flux</b>	600lm ±5% @ 4000K			

Lumen measurement complies with UKAS / IES LM79-80 accredited testing of production sample.

